

NORTON

SAINT-GOBAIN

Transforming
surfaces
...and beyond

SUPER*Flexible* Film

WE'RE FLEXING OUR MUSCLES!

Norton SuperFlexible Film is designed to conform efficiently to contours without compromising cutting performance. Easily sand hard-to-reach areas by using the Norton SuperFlexible Film perforated cut sheets or discs. Doesn't wrinkle or create hard edges, and can fold on itself, around a hand block or tool. Armed with an anti-load coating for longer life, the Norton SuperFlexible Film grits are color coded for easy identification.

www.nortonabrasives.com




SAINT-GOBAIN

NORTON

SAINT-GOBAIN

**SUPERFLEXIBLE
FILM SHEETS****WORK SMARTER,
NOT HARDER.**

- Durable yet flexible film backing conforms better to surfaces and contours, preventing “over sanding” or “burn through”
- Anti-loading stearate for optimum performance and long life
- Consistent scratch pattern and even finish

COLOR-CODED GRIT RANGE**P400****P600****P800****P1200****P1500****WET OR DRY**

Norton SuperFlexible Film Sheets are best used when:

- Denibbing (1200/1500)
- Blending
- Paint prep
- Bumper scuffing
- Primer blocking and scuffing
- Sanding edge panels
- Light scuffing on base coat
- Sanding primer surfacer

**Hook & Loop Cut Sheets**

PART #	GRIT	COLOR	PKG/CS QTY
6-11/16" x 5-1/8" - Perforated			
666233 90555	1500	Rose	25/100
666233 90554	1200	Amber	25/100
666233 90552	800	Citrine	25/100
666233 90551	600	Turquoise	25/100
666233 90550	400	Sapphire	25/100

**Primer Sanding**

- Sanding primer surfacer and e-coat surfaces (P400)
- Sanding e-coat, primer surfacer and clear coat surfaces (P600)

**Blending**

- Sanding primer surfacer and scuffing clear coat for blends (P800)

**Denibbing**

- Remove aggressive dirt nibs and texture from the paint surface (P1200)
- Remove minor imperfections from the paint surface (P1500)

TECH TIP

SuperFlexible Film Sheets and Discs can be used wet or dry!



Using dry will allow the technician to see while sanding. Wipe frequently to extend the life of the abrasive product.



Using wet will reduce loading while extending the life of the product.

NORTON

SAINT-GOBAIN

SUPERFLEXIBLE
FILM DISCS

COLOR-CODED GRIT RANGE

P1500

P2000

P2500

P3000

RECOMMENDED: USE WET

Norton SuperFlexible Film Discs are best used when:

- Denibbing (1500/2000)
- Blending
- Paint prep
- Paint Finishing

**Denibbing**

- Remove minor imperfections from the paint surface (P1500)
- Orange peel/defect removal (P1500)

**Paint Finishing**

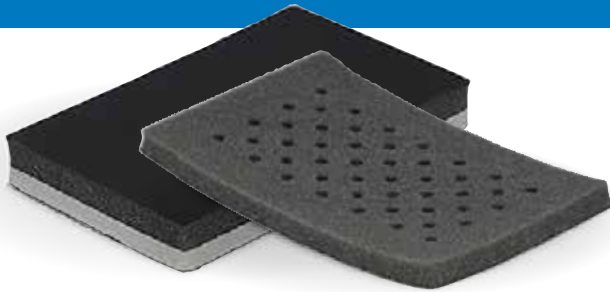
- Ultrafine clear coat smoothing for mirror finishing (P2000 - P3000)
- Polishing preparation/reducing surface roughness (P2000 - P3000)

Hook & Loop Discs

PART #	GRIT	COLOR	PKG/CS QTY
6" Discs			
666233 90559	3000	Meteorite	25/100
666233 90558	2500	Aquamarine	25/100
666233 90557	2000	Jade	25/100
666233 90556	1500	Rose	25/100
3" Discs			
666233 90564	3000	Meteorite	25/100
666233 90563	2500	Aquamarine	25/100
666233 90562	2000	Jade	25/100
666233 90561	1500	Rose	25/100

NORTON

SAINT-GOBAIN®

**SUPERFLEXIBLE FILM
SOFT SANDING PADS****WET OR DRY**

Norton Sanding Pads for SuperFlexible Film

The pads are made using very soft foam, specifically for hook and loop sheets and discs. The sanding pad's structure minimizes aggressive scratches and reduces peeling, reducing the need to change the backing pad frequently.

Soft Sanding Pads

PART #	APPLICATION	PKG/CS QTY
Soft Sanding Pad		
780727 42353	Manual sanding of hard-to-reach areas	8/1

Rigid/Soft Sanding Pads

PART #	APPLICATION	PKG/CS QTY
Rigid/Soft Sanding Pad		
780727 42355	Manual sanding of larger areas	4/1

Hook & Loop Foam Interface Pads

- Designed for use with our fine grit hook and loop sanding discs
- Improve both surface finish and cut rate Use with hook and loop back-up pads

PART #	SIZE (D x T)	STD. PKG.
Foam Hook & Loop Interface Pads		
636425 05457	3" x 1/2"	10
636425 42089	6" x 1/2"	5
636425 02162	6" x 3/4"	2

Low Profile Pads for Dual Action / Random Orbital Sanders

- Soft density low-profile pads utilize 1/2" thick foam for fine finish sanding and offer moderate conformability
- Medium low-profile pads have 1/2" thick urethane foam for intermediate and finish sanding
- Available with PSA (pressure sensitive adhesive) or hook and loop faces; both designs are shock resistant and have a fiberglass backing plate with a riveted 5/16"-24 threaded shank for added strength and increased heat resistance

PART #	SIZE (D)	DESCRIPTION	MAX RPM	STD. PKG.
636425 06128	3"	Hook & Loop Soft Low-Profile	12,000	10
636425 06130	6"	Hook & Loop Soft Low-Profile	12,000	5



www.facebook.com/NortonAbrasivesNA | www.youtube.com/NortonAbrasives | www.nortonabrasives.com

USA CUSTOMER SERVICE:

Toll Free Phone: 1 (800) 551-4413
Toll Free Fax: 1 (800) 551-4416

CANADA CUSTOMER SERVICE:

Toll Free Phone: 1 (800) 263-6565
Toll Free Fax: 1 (800) 561-9490

FORM #8963 REV. 09/22

© Saint-Gobain September 2022.

Norton and "Transforming surfaces and beyond" are trademarks of Saint-Gobain Abrasives. All other trademarks are the property of their respective owners.

NO-RISK TEST

